










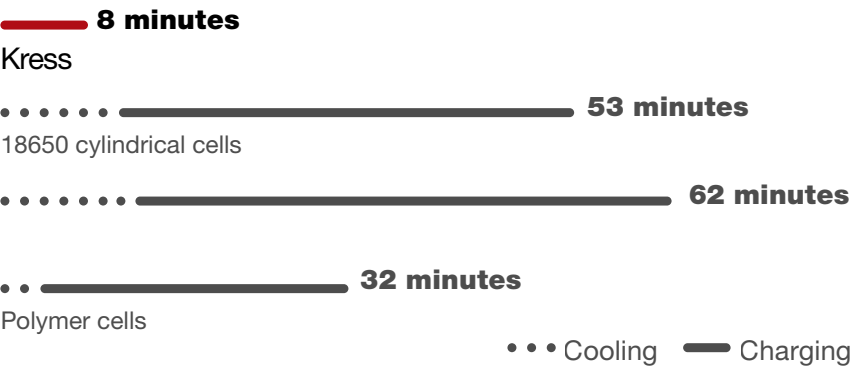




# 100% charged in eight minutes

The Kress CyberPack Batteries, 240 Wh and 660 Wh backpack, can charge from 0% to 100% in just eight minutes\* when using flash charge. Standard charge only takes 14 minutes, providing faster charge times for no down time!





\* When charging 4Ah or 11Ah Kress CyberPack batteries with the KAC875 or KAC877 CyberTank Charger

## BATTERY CHARGING TIMES - MIN

|   |               | 5 kWh CyberTank<br>KAC875   |  | 7.2 kWh CyberTank<br>KAC877   |  | Charger<br>KAC840   |  |                 |
|---|---------------|---|--|---|--|---|--|-----------------|
|   |               |      |  |      |  |      |  |                 |
| Battery   | Charging Mode | Charging Level  |  | Charging Level  |  | Charging Level  |  | Charging Cycles |
|   |               |  80% |  100% |  80% |  100% |  80% |  100% |                 |
|  <b>KAC804<br/>4 Ah</b>        | Flash Charge  | 5   | 8  | 5   | 8  | 8   | 12   | 3000            |
|   | Normal        | 10  | 14   | 10  | 14   |   |  |                 |
|  <b>KAC810<br/>11 Ah</b>       | Flash Charge  | 5   | 8  | 5   | 8  | 18  | 25   |                 |
|   | Normal        | 10  | 14   | 10  | 14   |   |  |                 |
|  <b>2 x KAC804<br/>4 Ah</b>   | Normal        | 10  | 14   | 10  | 14   | /   | 24   |                 |
|  <b>2 x KAC810<br/>11 Ah</b> | Normal        | 10  | 14   | 10  | 14   | /   | 50   |                 |

Note: Charging time varies with different temperature.

## WORKING TIMES PER CHARGE - MIN

| Battery  | Grass Trimmer<br>KC100 |         | Lawn Edger<br>KC150 |         | Brush Cutter<br>KC170 |             |         | Hedge Trimmer<br>KC200 |         | Chain Saw<br>KC300 | Backpack Blower<br>KC500 |                            |         | Mower<br>KC711/710 |         |                            |
|--|------------------------|---------|---------------------|---------|-----------------------|-------------|---------|------------------------|---------|--------------------|--------------------------|----------------------------|---------|--------------------|---------|----------------------------|
| Model  | Speed Level            | Runtime | Speed Level         | Runtime | Mode                  | Speed Level | Runtime | Speed Level            | Runtime | Runtime            | Speed Level              | Blowing Force <sup>1</sup> | Runtime | Speed Level        | Runtime |                            |
| <b>KAC804<br/>4 Ah</b><br>  | Highest                | 30      | Highest             | 105     | Line Head             | Highest     | 30      | Highest                | 147     | 24                 | 1                        | 13                         | 18.5    | —                  |         |                            |
|  |                        |         |                     |         |                       | Lowest      | 63      |                        |         |                    |                          |                            |         |                    |         |                            |
|  | Lowest                 | 63      | Lowest              | 143     | Blade                 | Highest     | 54      | Lowest                 | 168     |                    | 2                        | 20                         | 10.5    |                    |         |                            |
|  |                        |         |                     |         |                       | Lowest      | 89      |                        |         |                    |                          |                            |         |                    |         |                            |
| <b>KAC810<br/>11 Ah</b><br> | Highest                | 83      | Highest             | 289     | Line Head             | Highest     | 83      | Highest                | 403     | 66                 | 1                        | 13                         | 52      | Highest            | 46      | Up to 3/4 acre,<br>3000 m² |
|  |                        |         |                     |         |                       |             |         |                        |         |                    |                          |                            | Lowest  |                    |         |                            |
|  | Lowest                 | 174     | Lowest              | 394     | Blade                 | Highest     | 149     | Lowest                 | 460     |                    | 3                        | 27                         | 20      | Lowest             | 54      |                            |
|  |                        |         |                     |         |                       | Lowest      | 245     |                        |         |                    |                          |                            | 4       |                    |         |                            |

Note: Battery capacity, machine pairing, and task type affect working time on a fully charged battery. This chart provides estimated maximum operating times for grass trimmer, lawn edger, brush cutter, hedge trimmer in different work scenarios under no-load conditions. Blower and mower under loaded ones. Runtimes will vary based on load applied. <sup>1</sup> Newton(N); <sup>2</sup> Working Range Per Battery Charge.